


Replacement Parts for Reel Rinse Control Unit

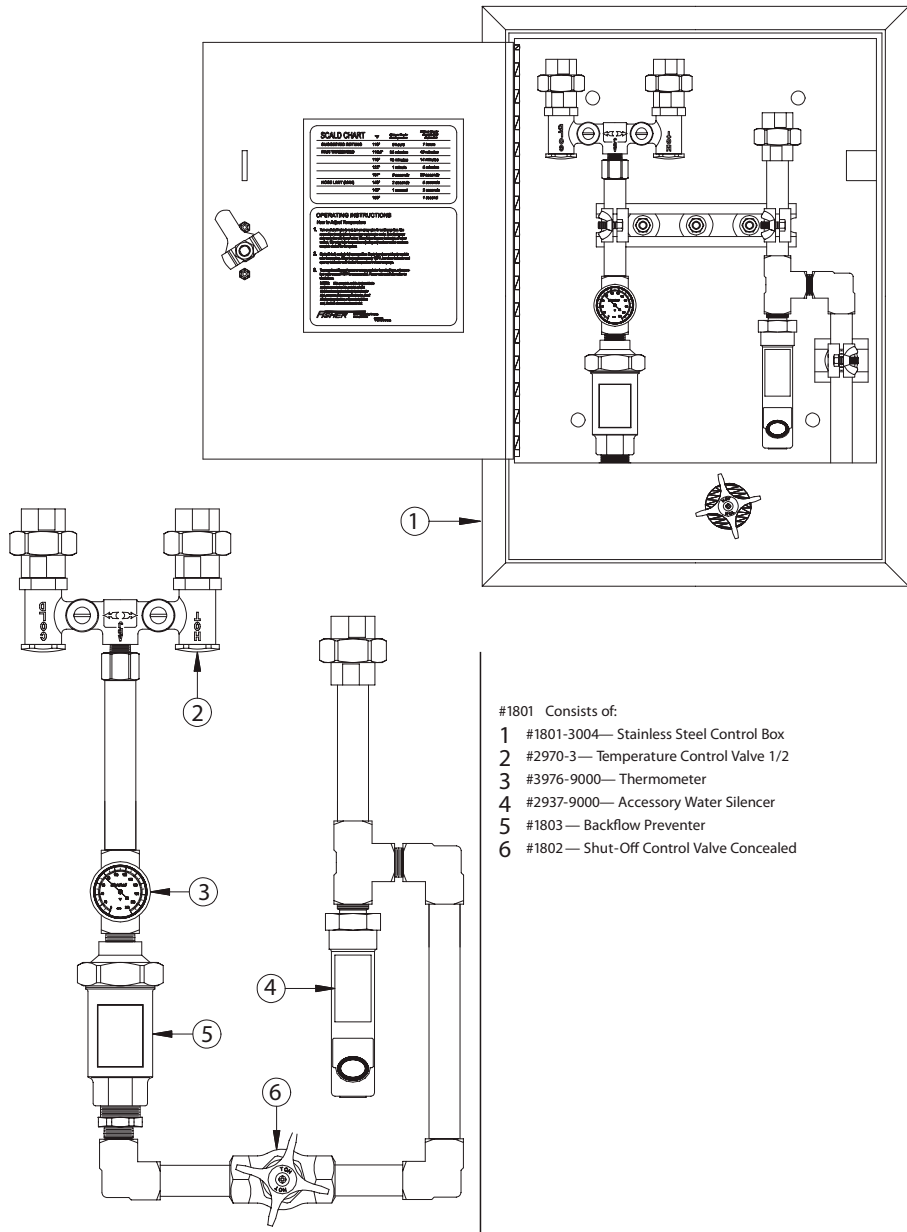

- #1801 Consists of:
- 1 #1801-3004—Stainless Steel Control Box
 - 2 #2970-3—Temperature Control Valve 1/2
 - 3 #3976-9000—Thermometer
 - 4 #2937-9000—Accessory Water Silencer
 - 5 #1803—Backflow Preventer
 - 6 #1802—Shut-Off Control Valve Concealed

FISHER
MANUFACTURING COMPANY
PO BOX 60, TULARE, CA 93275
(800)421-6162, FAX: (800)832-8238
www.fisher-mfg.com

Reel Rinse Control Unit, Concealed & Exposed Mounting Product Installation Guide

Since 1936, Fisher Manufacturing Company has manufactured heavy-duty, high quality plumbing products and hardware specialties for the food service industry. For three generations, the Fisher family has adhered to a strict dedication of and overall value. When you install Fisher products... you install the best. Our hardware is manufactured with the standardization of internal mechanisms. All chrome plating is triple plated copper, nickel and chrome for durability. Every piece of equipment we make is rigorously tested in both our modern in-house testing center and in actual field situations under extreme conditions. Every detail is thoroughly checked. Before we make our products available to you, they pass each and every test. You get proven performance. Guaranteed.


Limited One Year Warranty

Fisher Manufacturing Company warrants its products and parts thereof (except as noted below) against defects in materials or workmanship for a period of one year after the date of original purchase. During this period Fisher Manufacturing Company will replace a defective product or part without charge to you, provided that the entire product is delivered to Fisher Manufacturing Company. All transportation and insurance charges for shipping the product to and from Fisher Manufacturing Company must be borne by you. Charges for transportation and insurance may, at the option of Fisher Manufacturing Company, be refunded depending upon our investigation of the warranty claim. This warranty does not cover external finish (except at date of original purchase) or labor costs not specifically authorized by Fisher Manufacturing Company.

A full and complete copy of our One Year limited warranty is available upon request.

WARNING:

Proposition 65 requires that we provide you with the following notice: "This product Contains A Chemical Known To The State Of California To Cause Birth Defects Or Other Reproductive Harm."

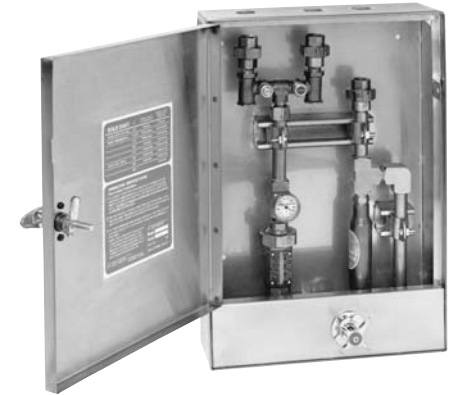

#1801 - Reel Rinse Control Unit.

KEEP THIS MANUAL FOR FUTURE REFERENCE



ANSI/A112.18.1M, ANSI/NSF 61.9

Installation Instructions for Reel Rinse Control Unit


BE SURE TO CHECK WITH YOUR LOCAL DEPARTMENT HAVING JURISDICTION REGARDING BACKFLOW PREVENTION

Installation Notes:

- Be sure to shut off water supply before beginning.
- Use pipe thread sealant such as PST on all threaded joints.
- Check the packaging for missing items BEFORE beginning installation. If items are missing, contact your supplier.


Tools Required for Installation

- Medium Sized Crescent Wrench
- Pipe Thread Sealant
- Phillips Screwdriver
- 7/16" Drill Bit



Installation Instructions

1. Concealed and Exposed are two types of installations, Please determine which installation is suitable for you. For a concealed installation go to step 2 and for an exposed installation start on step 5.
2. For a Concealed install, slide shroud over reel rinse control unit.
3. Place reel rinse control unit in framed box . Align control unit with stud holes and mount.
4. Connect existing plumbing into reel rinse control unit. Turn on water supply and check for leaks.
5. For a Exposed install, remove shroud from reel rinse control unit.
6. Place reel rinse control unit in desired location. Use the 4 holes inside the reel rinse control box to mount on dry wall surface.
7. Connect existing plumbing into reel rinse control unit. Turn on water supply and check for leaks.

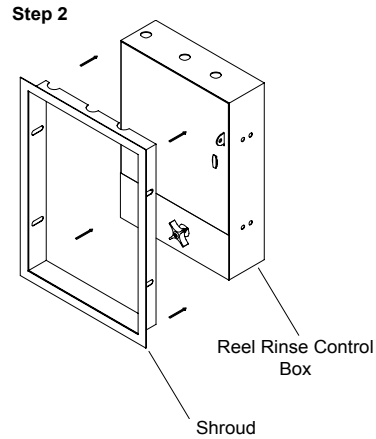

Installation Instructions Continued

