

APPLICATION:

PRODUCT NAME:

**3/4 SPOUTS**

JOB NAME:

MODEL:


- 5000-0020 3/4 SPOUT 07SS
- 5000-0001 3/4 SPOUT 10SS
- 5000-0002 3/4 SPOUT 14SS

QUANTITY:

ITEM NO.:

OPTIONS OR MODIFICATIONS:

- OTHER \_\_\_\_\_

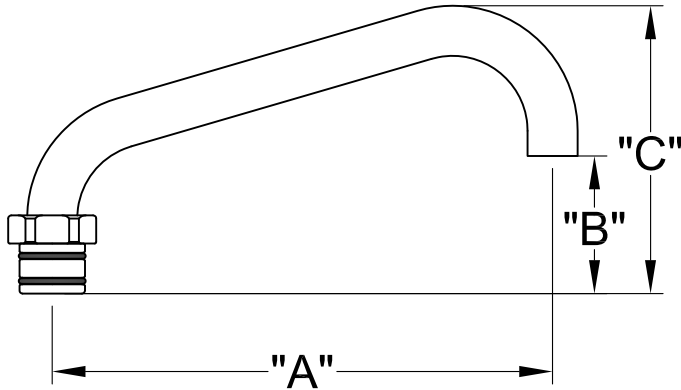

FEATURES

RECOMMENDED SETTINGS

- \* 110°F AT 80 PSI

SYSTEM LIMITS

- \* TEMP: 40°F MIN. TO 160°F MAX.
- \* PRESSURE: 200 PSI MAX. STATIC

SHIPPING WEIGHT

- \* 1.0 LBS

PRODUCT COMPLIANCE:

- \* ASME A112.18.1 / CSA B125.1
- \* NSF 61 - Section 9
- \* NSF 372 (Low Lead Content)

MODEL	DIM "A"	DIM "B"	DIM "C"
5000-0020	7-3/8" [187mm]	1-1/2" [38mm]	4-1/2" [114mm]
5000-0001	10" [254mm]	2-1/8" [54mm]	5-1/4" [133mm]
5000-0002	14" [356mm]	3-1/2" [89mm]	6-3/4" [171mm]



FISHER MANUFACTURING COMPANY  
 TOLL FREE: 800-421-6162 - FAX: 800-832-8238  
 information@fisher-mfg.com - www.fisher-mfg.com