



Customer/Wholesaler:	Date:	Job Name:	Model Specified:	Quantity:
Contractor:		Architect/Engineer:		





GOOSENECK SPOUT W/ 2.2 GPM AERATOR 55/64-27F, CONVERTS TO RIGID W/ SERRATED LOCK WASHER, INCLUDED

QUARTER TURN CERAMIC DISK CARTRIDGES W/ CHECK STEMS & COLOR CODED INDEXES

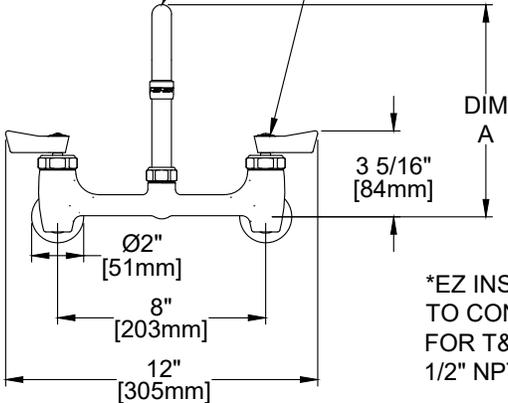

\*EZ INSTALL ADAPTERS TO CONNECT TO EXISTING HARDWARE FOR T&S, CHICAGO, KROWNE, 1/2" NPT ECCENTRIC FEMALE FLANGES

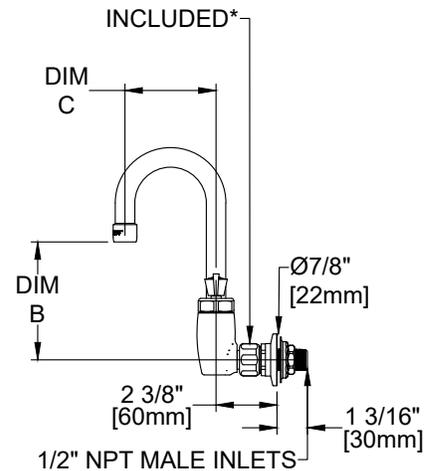



MODEL	DESCRIPTION	DIM A	DIM B	DIM C
47340	FAUCET 8BSCDLH 06SGN 2.20 GPM EZ	8 3/16" [207mm]	4 9/16" [115mm]	3 1/2" [89mm]
47320	FAUCET 8BSCDLH 12SGN 2.20 GPM EZ	12 15/16" [328mm]	8 9/16" [217mm]	5" [127mm]

PRODUCT SPECIFICATIONS: 8" BACKSPASH FAUCET, QUARTER TURN CERAMIC DISK CARTRIDGES W/ CHECK STEMS, LEVER HANDLES, 6" OR 12" SWIVEL OR RIGID GOOSENECK SPOUT W/ 2.2 GPM @ 60 PSI AERATOR, 1/2" NPT MALE INLETS, INCLUDES EZ INSTALL ADAPTERS

PRODUCT COMPLIANCE: ASME A112.18.1 / CSA B125.1 NSF 61 - Section 9 NSF 372 (Low Lead Content)

Customer/Wholesaler:	Date:	Job Name:	Model Specified:	Quantity:
Contractor:		Architect/Engineer:		

## REPLACEMENT PARTS

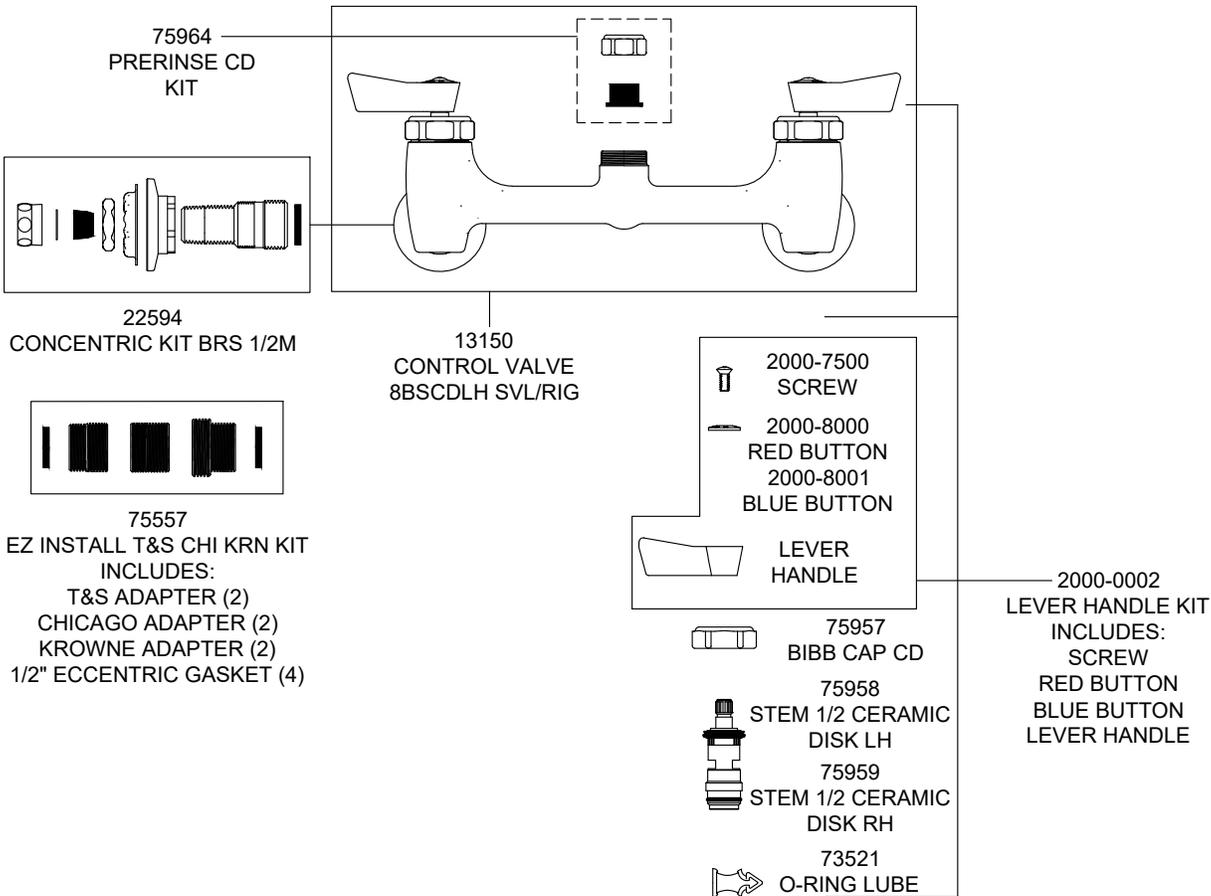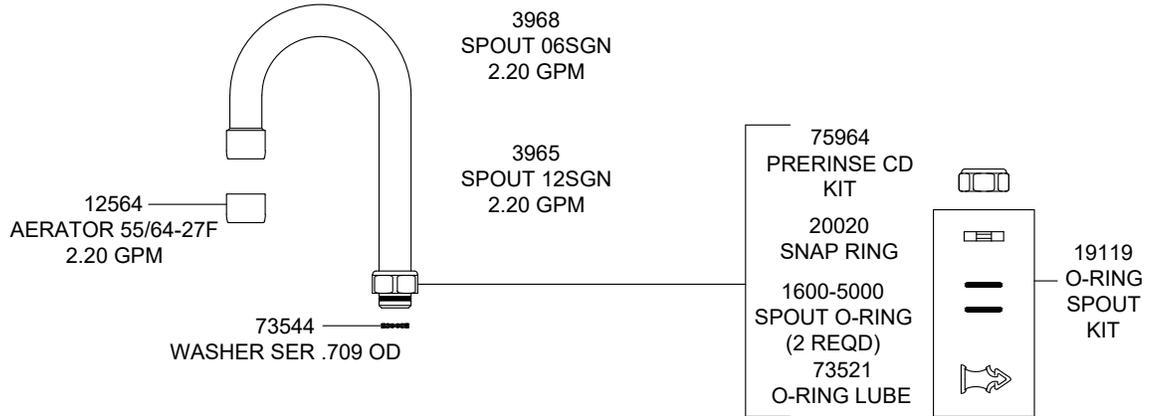

PRODUCT SPECIFICATIONS: 8" BACKSPASH FAUCET, QUARTER TURN CERAMIC DISK CARTRIDGES W/ CHECK STEMS, LEVER HANDLES, 6" OR 12" SWIVEL OR RIGID GOOSENECK SPOUT W/ 2.2 GPM @ 60 PSI AERATOR, 1/2" NPT MALE INLETS, INCLUDES EZ INSTALL ADAPTERS

PRODUCT COMPLIANCE:  
ASME A112.18.1 / CSA B125.1  
NSF 61 - Section 9  
NSF 372 (Low Lead Content)