





Customer/Wholesaler:	Date:	Job Name:	Model Specified:	Quantity:
Contractor:	Architect/Engineer:			

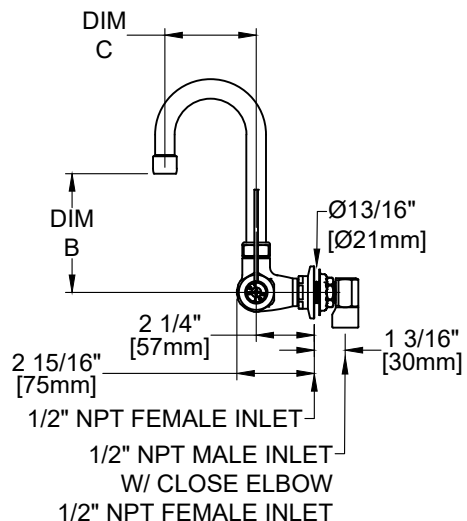

GOOSENECK SPOUT W/ 2.2 GPM
AERATOR 55/64-27F, CONVERTS
TO RIGID W/ SERRATED LOCK
WASHER, INCLUDED

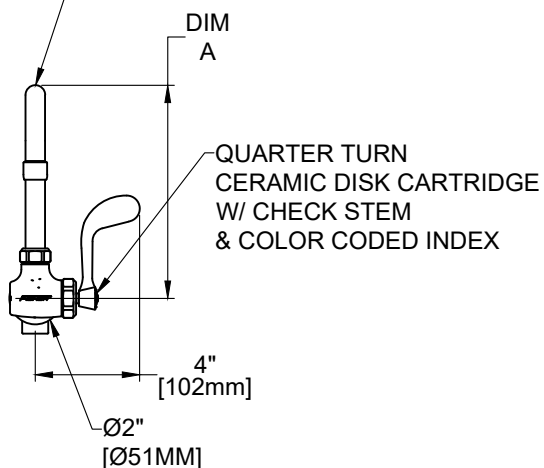

MODEL	DESCRIPTION	DIM A	DIM B	DIM C
20600	FAUCET SWCDWH 06SGN 2.20 GPM NP EL	8 3/16" [208mm]	4 9/16" [116mm]	3 1/2" [89mm]
20610	FAUCET SWCDWH 12SGN 2.20 GPM NP EL	12 15/16" [328mm]	8 9/16" [217mm]	5" [127mm]

PRODUCT SPECIFICATIONS: SINGLE WALL FAUCET WITH CERAMIC CARTRIDGE, WRIST
HANDLE, 6" OR 12" GOOSENECK SPOUT, 2.20 GPM @ 60 PSI AERATOR, CLOSE NIPPLE, CLOSE
ELBOW

PRODUCT COMPLIANCE:
ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)

FISHER®

FISHER MANUFACTURING COMPANY TOLL FREE: 800-421-6162 - FAX: 800-832-8238
customer@fisherfaucets.com - www.fisherfaucets.com

PRODUCT NAME:

FAUCET SWCDWH SGN 2.20 GPM NP EL

Customer/Wholesaler:

Date:

Job Name:

Model Specified:


Quantity:

Contractor:

Architect/Engineer:

SPEC. FACB-BR-SWEW

REPLACEMENT PARTS

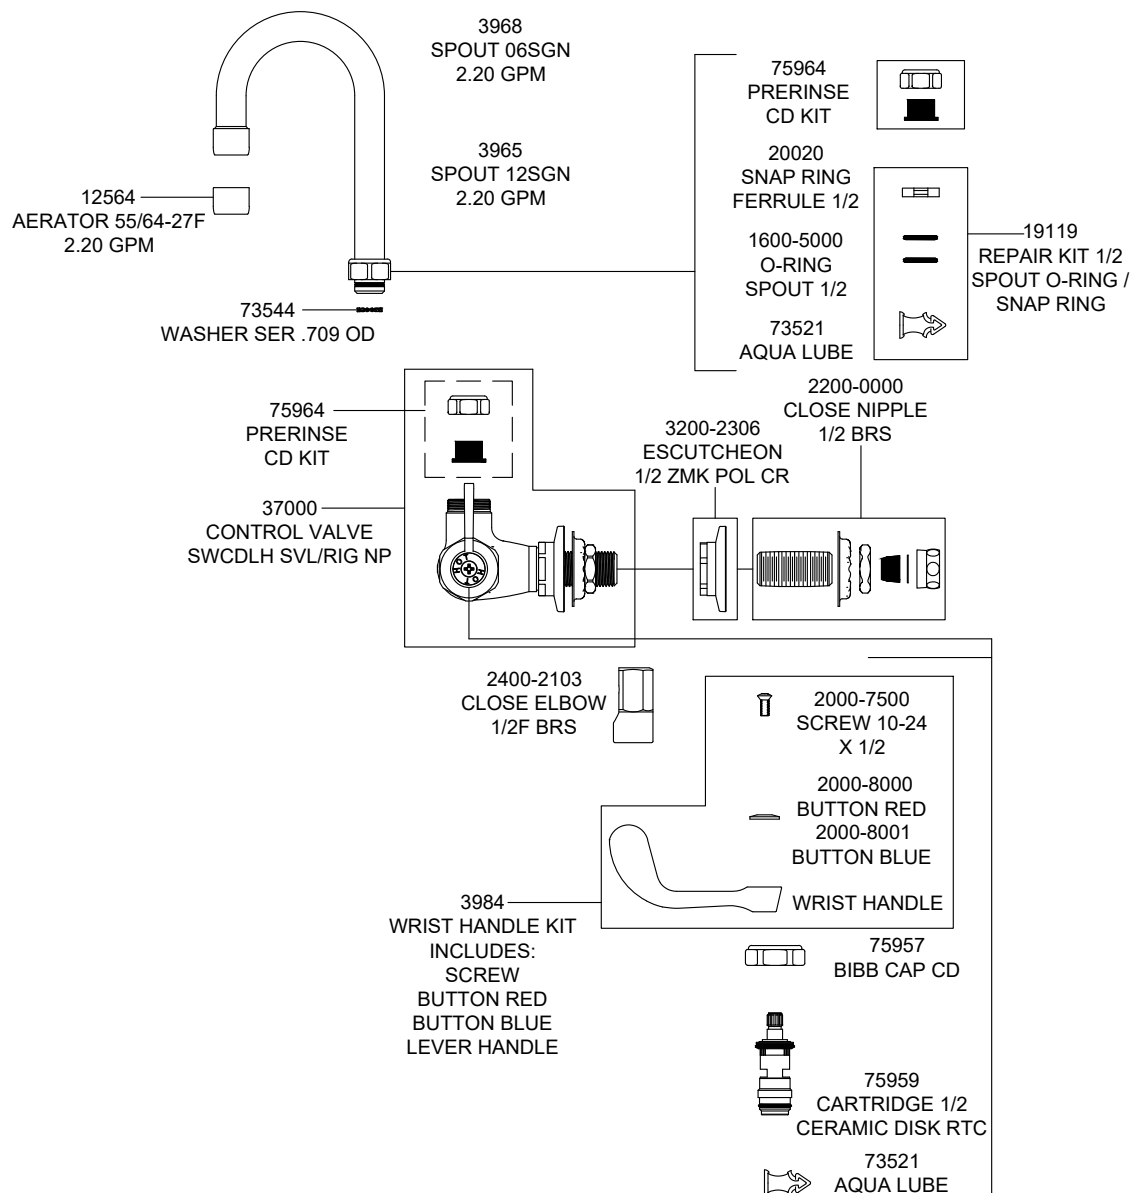

PRODUCT SPECIFICATIONS: SINGLE WALL FAUCET WITH CERAMIC CARTRIDGE, WRIST HANDLE, 6" OR 12" GOOSENECK SPOUT, 2.20 GPM @ 60 PSI AERATOR, CLOSE NIPPLE, CLOSE ELBOW

PRODUCT COMPLIANCE:
ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)

Drawn: LC

Checked: EM

Approved: LC

Date: 05/28/26

Sheet: 2 of 2