


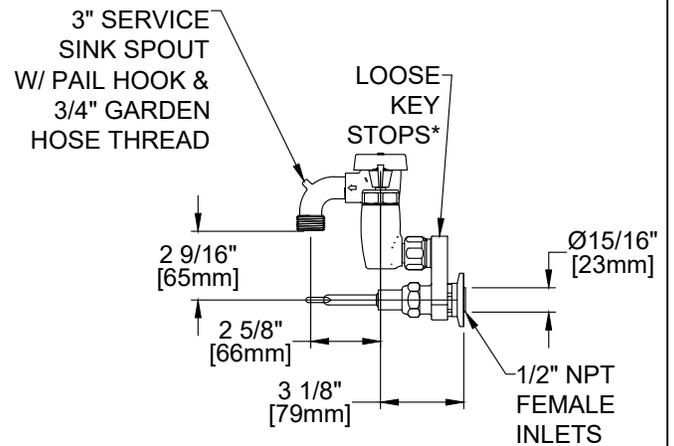


Customer/Wholesaler:	Date:	Job Name:	Model Specified: 24530	Quantity:
Contractor:		Architect/Engineer:		

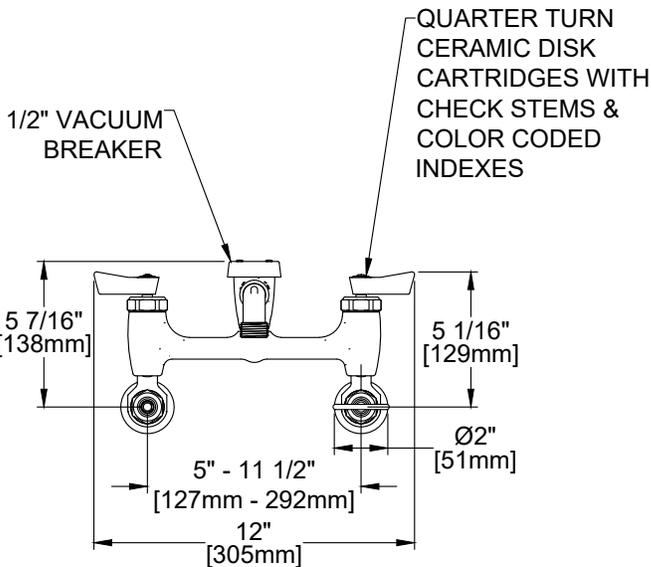

*ADJUSTABLE ECCENTRIC
LOOSE KEY STOPS
OPERATED
W/ REMOVABLE KEY




PRODUCT SPECIFICATIONS: 8" ADJUSTABLE WALL FAUCET, QUARTER TURN CERAMIC DISK CARTRIDGES W/ CHECK STEMS, LEVER HANDLES, ECCENTRIC LOOSE KEY STOPS, 3" SERVICE SINK SPOUT W/ VACUUM BREAKER 11.5 GPM @ 60 PSI, 1/2" NPT FEMALE INLETS

PRODUCT COMPLIANCE:
ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)

Customer/Wholesaler:	Date:	Job Name:	Model Specified: 24530	Quantity:
Contractor:	Architect/Engineer:			

REPLACEMENT PARTS

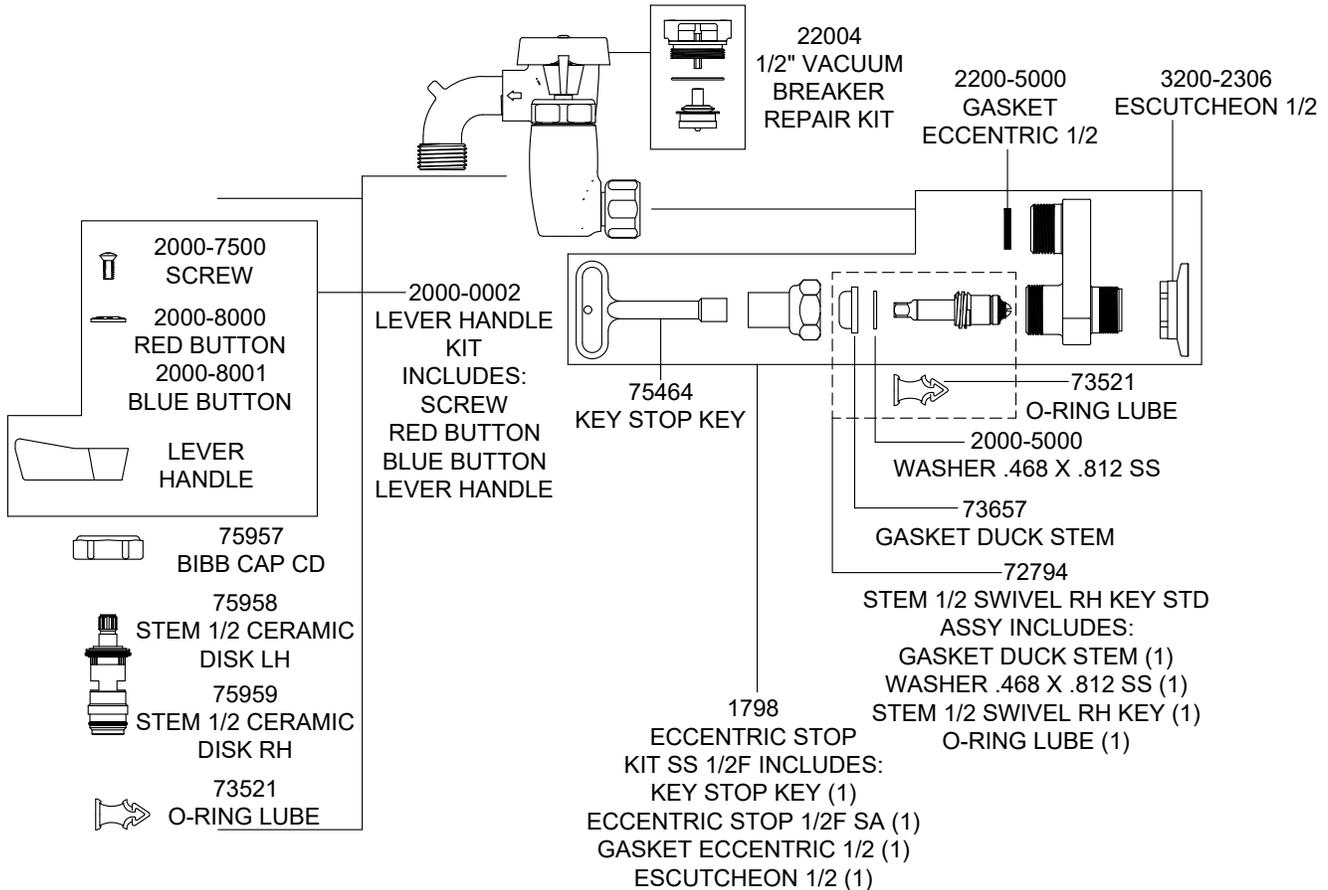

PRODUCT SPECIFICATIONS: 8" ADJUSTABLE WALL FAUCET, QUARTER TURN CERAMIC DISK CARTRIDGES W/ CHECK STEMS, LEVER HANDLES, ECCENTRIC LOOSE KEY STOPS, 3" SERVICE SINK SPOUT W/ VACUUM BREAKER 11.5 GPM @ 60 PSI, 1/2" NPT FEMALE INLETS

PRODUCT COMPLIANCE:
ASME A112.18.1 / CSA B125.1
NSF 61 - Section 9
NSF 372 (Low Lead Content)