


Customer/Wholesaler:	Date:	Job Name:	Model Specified: 34420	Quantity:
Contractor:		Architect/Engineer:		

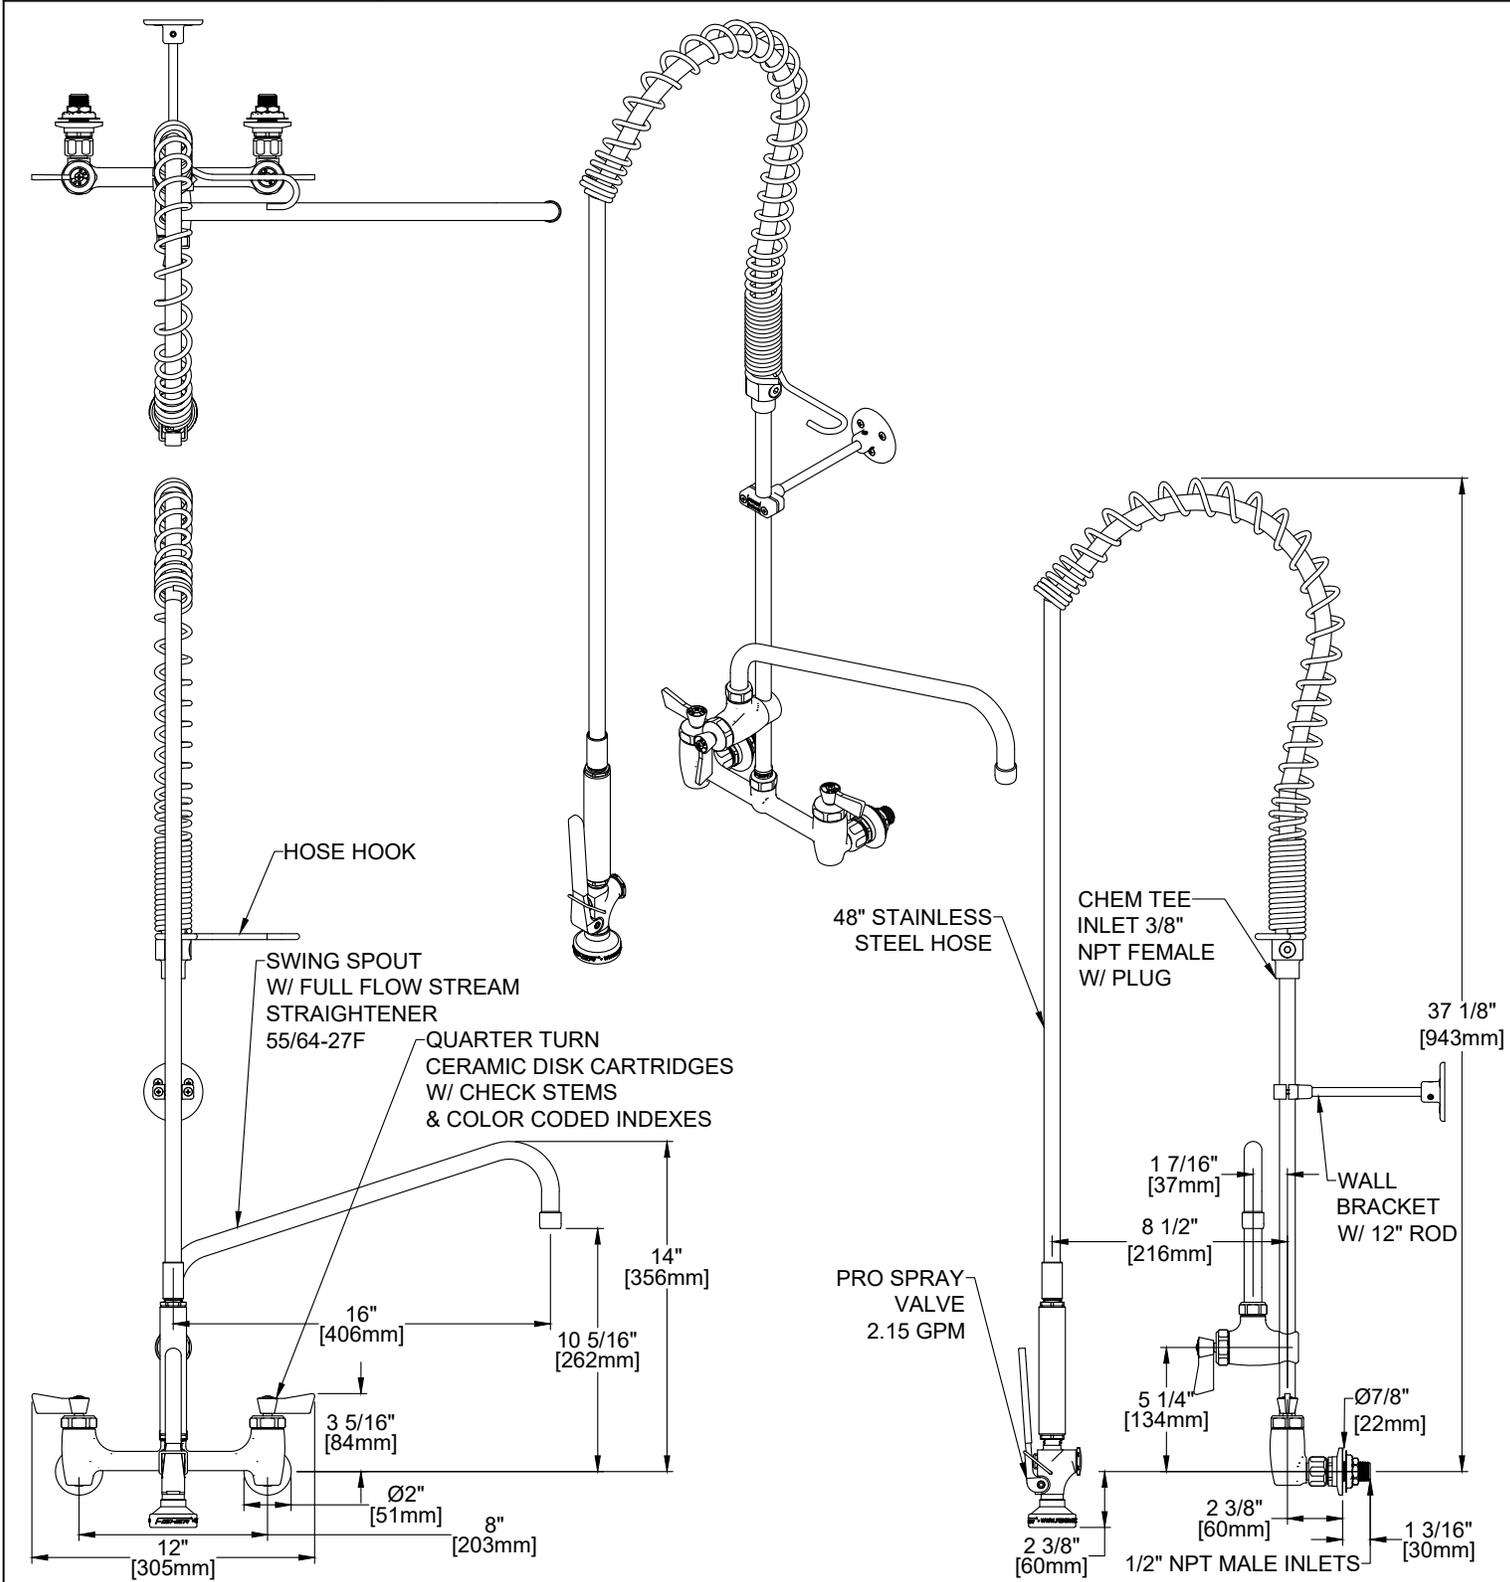


PRODUCT SPECIFICATIONS: 8" BACKSPASH SPRING PRERINSE 2.15 GPM @ 60 PSI, WITH CERAMIC CARTRIDGES, LEVER HANDLES, ADDON FAUCET, 16" SWING SPOUT 12.5 GPM @ 60 PSI, PRO SPRAY VALVE

PRODUCT COMPLIANCE: ASME A112.18.1 / CSA B125.1 NSF 61 - Section 9 NSF 372 (Low Lead Content)

Customer/Wholesaler:	Date:	Job Name:	Model Specified: 34420	Quantity:
Contractor:		Architect/Engineer:		

REPLACEMENT PARTS

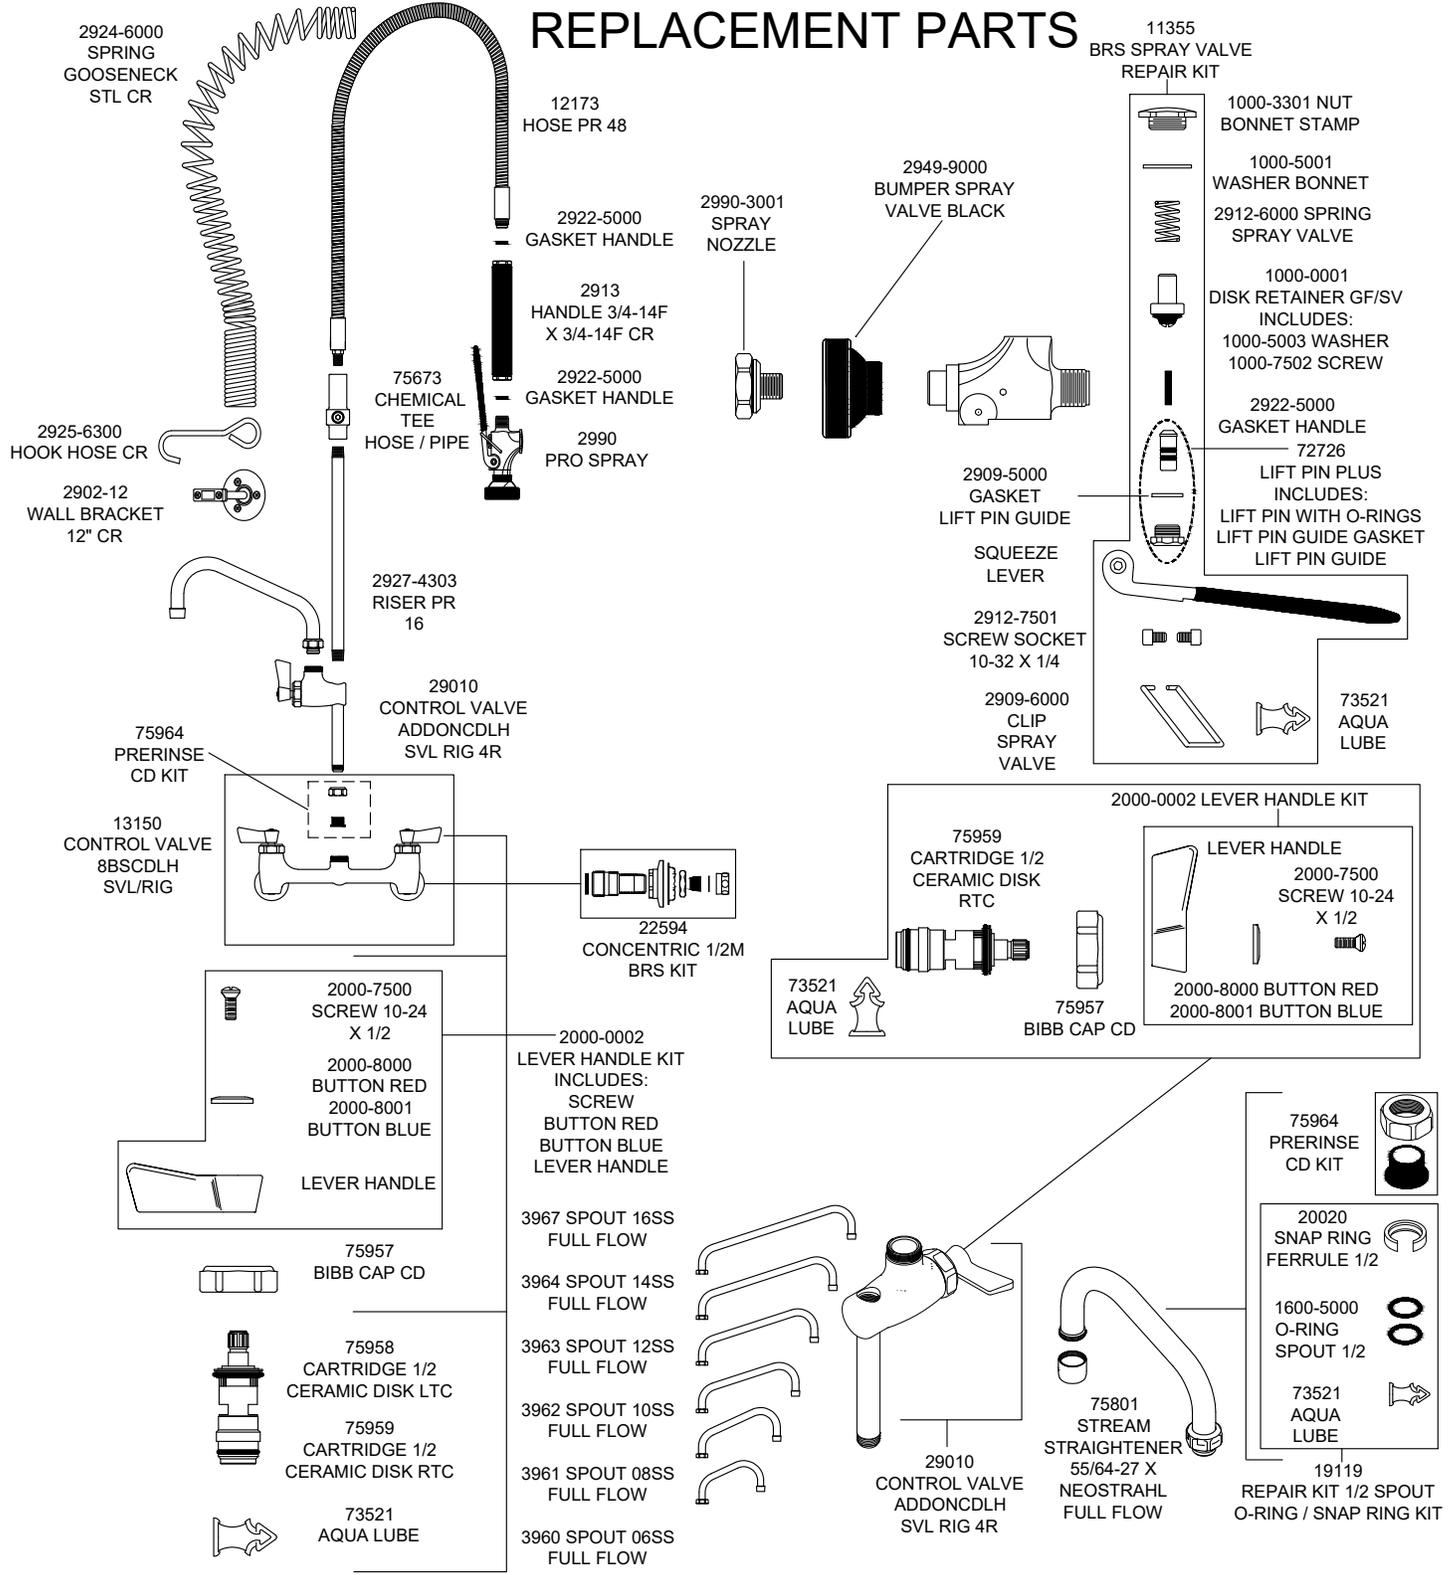

PRODUCT SPECIFICATIONS: 8" BACKSPASH SPRING PRERINSE 2.15 GPM @ 60 PSI, WITH CERAMIC CARTRIDGES, LEVER HANDLES, ADDON FAUCET, 16" SWING SPOUT 12.5 GPM @ 60 PSI, PRO SPRAY VALVE

PRODUCT COMPLIANCE: ASME A112.18.1 / CSA B125.1 NSF 61 - Section 9 NSF 372 (Low Lead Content)