
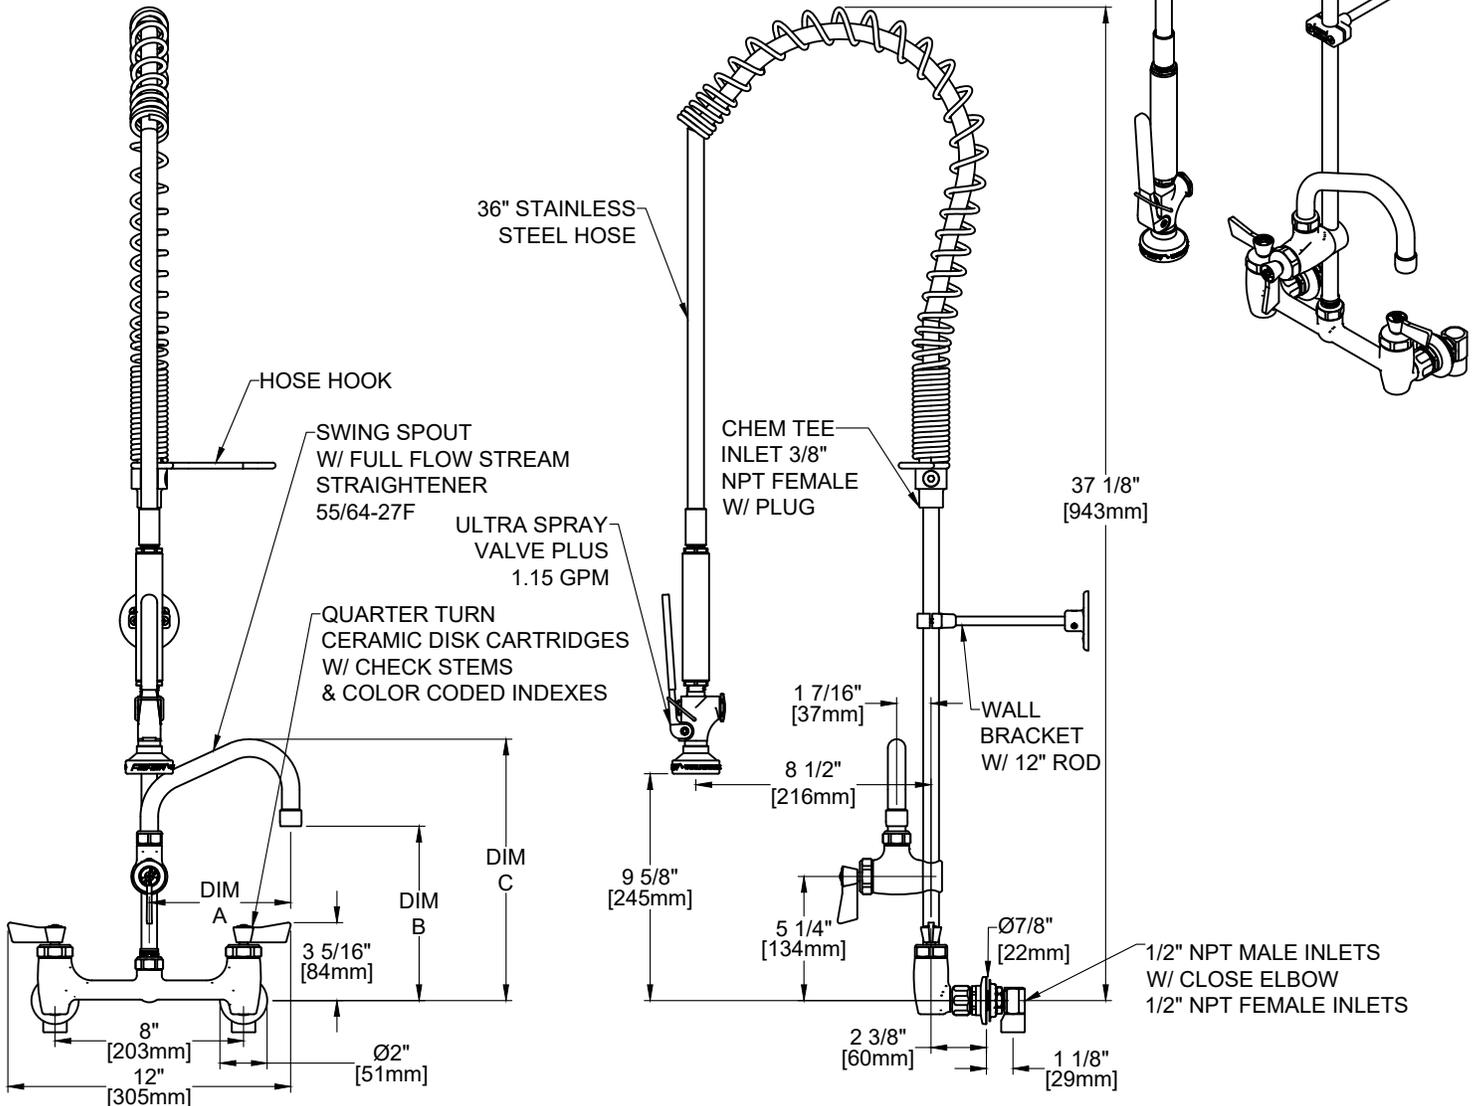
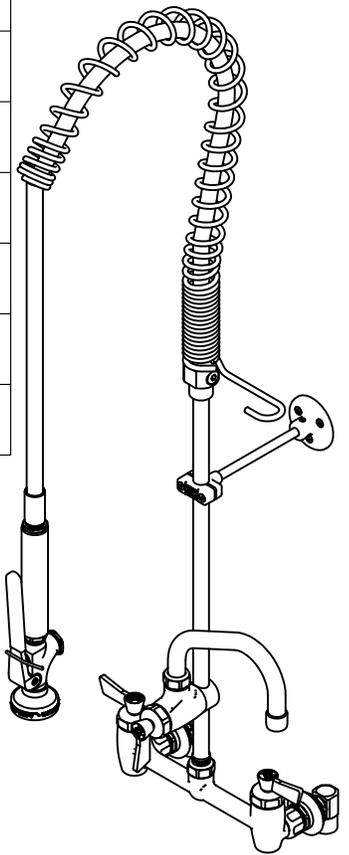


Customer/Wholesaler:	Date:	Job Name:	Model Specified:	Quantity:
Contractor:		Architect/Engineer:		

MODEL	DESCRIPTION	DIM A	DIM B	DIM C
55420	PRERINSE SPG 8BSCDLH 06SS EL	6" [152mm]	7 3/8" [188mm]	11 1/8" [282mm]
55430	PRERINSE SPG 8BSCDLH 08SS EL	8" [203mm]	8 5/16" [212mm]	12" [305mm]
55440	PRERINSE SPG 8BSCDLH 10SS EL	10" [254mm]	8 3/8" [212mm]	12 1/16" [306mm]
55460	PRERINSE SPG 8BSCDLH 12SS EL	12" [305mm]	9" [229mm]	12 11/16" [322mm]
55470	PRERINSE SPG 8BSCDLH 14SS EL	14" [356mm]	9 11/16" [245mm]	13 3/8" [339mm]
55480	PRERINSE SPG 8BSCDLH 16SS EL	16" [406mm]	10 5/16" [262mm]	14" [356mm]

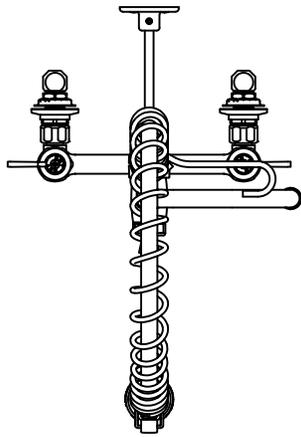


PRODUCT SPECIFICATIONS: 8" BACKSPASH SPRING PRERINSE UNIT 1.15 GPM @ 60 PSI, WITH CERAMIC CARTRIDGES, LEVER HANDLES, ADDON FAUCET, SWING SPOUT 12.5 GPM @ 60 PSI, CLOSE ELBOWS

PRODUCT COMPLIANCE:  
ASME A112.18.1 / CSA B125.1  
NSF 61 - Section 9  
NSF 372 (Low Lead Content)  
2019 DOE PRSV - Class II

Customer/Wholesaler:	Date:	Job Name:	Model Specified:	Quantity:
Contractor:		Architect/Engineer:		

## REPLACEMENT PARTS

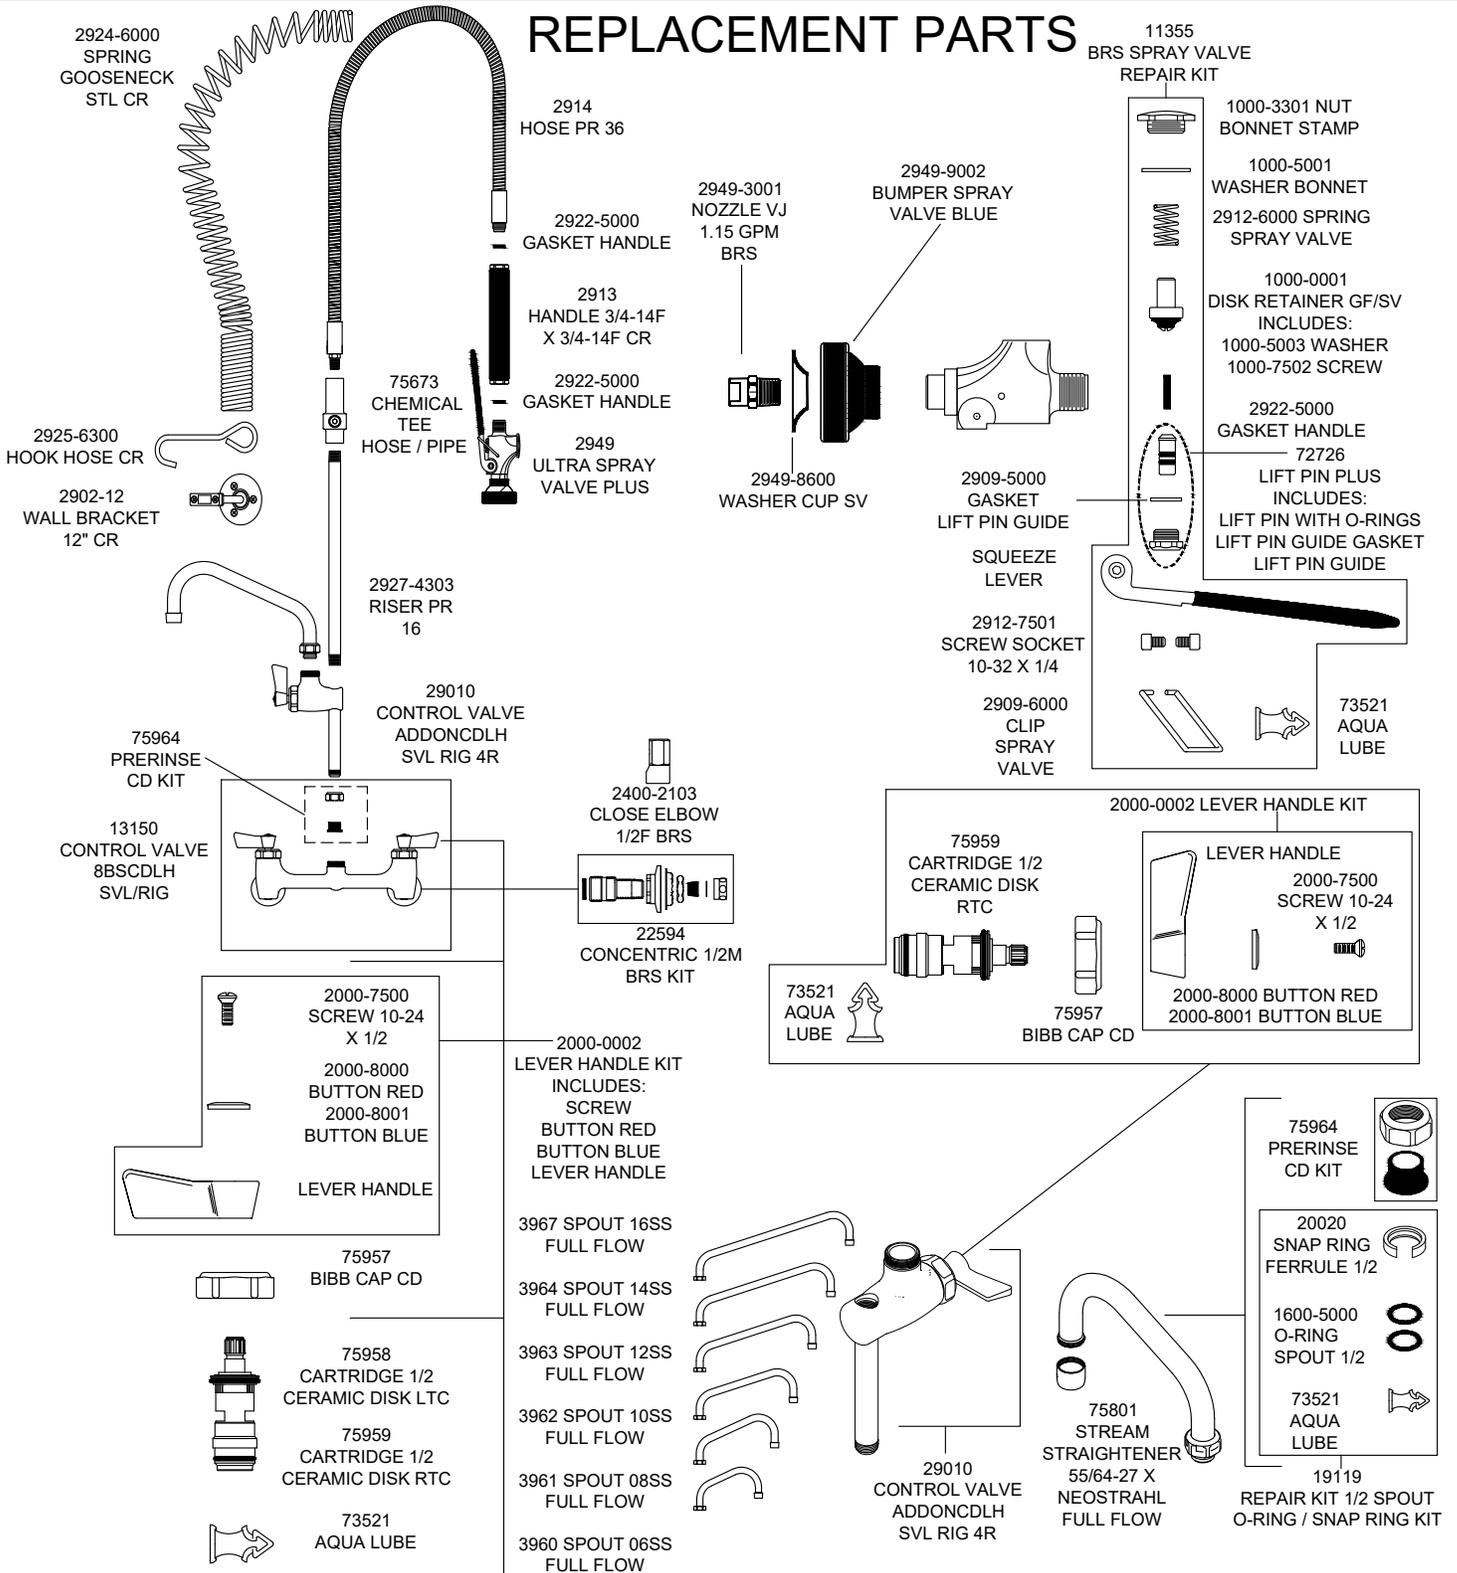

PRODUCT SPECIFICATIONS: 8" BACKSPASH SPRING PRERINSE UNIT 1.15 GPM @ 60 PSI, WITH CERAMIC CARTRIDGES, LEVER HANDLES, ADDON FAUCET, SWING SPOUT 12.5 GPM @ 60 PSI, CLOSE ELBOWS

PRODUCT COMPLIANCE: ASME A112.18.1 / CSA B125.1 NSF 61 - Section 9 NSF 372 (Low Lead Content) 2019 DOE PRSV - Class II